



# SWATYCOMET PROFESSIONAL

Thin cutting-off wheels for Stainless steel & Steel



The new  
Trademark  
**SWATYCOMET**  
and higher  
quality  
level.

SWATYCOMET



**NEW GENERATION  
PRODUCT**

# SWATYCOMET PROFESSIONAL


## Application:

- For steel, stainless steel, metal
- Peripheral speed 80 m/s
- Suitable for use on angle grinders
- Resin bonded, reinforced cutting wheels
- Manufactured in accordance with the EN 12413 and OSA standards



## Advantages:

- New, improved performance
- Excellent cutting capabilities
- Faster cut
- Longer tool life
- Optimal ratio of cutting effect to product price

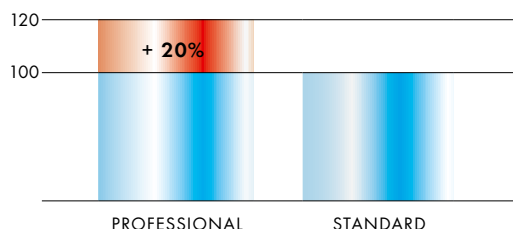

## QUALITY

## QUALITY CLASS

## MATERIAL

20A60R-BF, 20A46R-BF A60T-BF, A46T-BF	PROFESSIONAL	Stainless steel, steel
16A60R-BF, 16A46R-BF	PROFESSIONAL	Steel, metals Stainless steel +steel

Type	Dimensions D x T x H mm	"	Peripheral speed m/s	RPM min <sup>-1</sup>	Grit size	Packaging (units)
F41, F42	100 x 1 x 16	4" x ,040" x 5/8"	80	15300	60	25
F41, F42	115 x 1 x 22,23	4 1/2" x ,040" x 7/8"		13300		
F41, F42	125 x 1 x 22,23	5" x ,040" x 7/8"	12250	46		
F41, F42	100 x 1,2 x 16	4" x ,045" x 7/8"	15300			
F41, F42	115 x 1,2 x 22,23	4 1/2" x ,045" x 7/8"	13300	46		
F41, F42	125 x 1,2 x 22,23	5" x ,045" x 7/8"	12250			
F41, F42	100 x 1,6 x 16	4" x 1/16" x 5/8"	15300	46		
F41, F42	115 x 1,6 x 22,23	4 1/2" x 1/16" x 7/8"	13300			
F41, F42	125 x 1,6 x 22,23	5" x 1/16" x 7/8"	12250	46		
F41, F42	150 x 1,6 x 22,23	6" x 1/16" x 7/8"	10200			
F41, F42	180 x 1,6 x 22,23	7" x 1/16" x 7/8"	8500	46		
F41, F42	150 x 1,9 x 22,23	6" x ,075" x 7/8"	10200			
F41, F42	180 x 1,9 x 22,23	7" x ,075" x 7/8"	8500	46		
F41, F42	230 x 1,9 x 22,23	9" x ,075" x 7/8"	6650			

